(19) Europea Office e

Europäisches Patentamt European Patent Office Office européen des brevets



EP 1 502 587 A1

(12)

EUROPEAN PATENT APPLICATION

- (43) Date of publication: 02.02.2005 Builetin 2005/05
- (51) Int Cl.7: A61K 9/48, A61K 31/137
- (21) Application number: 03386019.8
- (22) Date of filing: 30.07.2003
- (84) Designated Contracting States:
 AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
 HU IE IT LI LU MC NL PT RO SE SI SK TR
 Designated Extension States:
 AL LT LV MK
- (71) Applicant: Pharmathen S.A. Pallini, Attikis 15351 (GR)
- (72) Inventors:
 - Karavas, Evangelos
 Agios Dimitrios Attikis 173 42 (GR)

- Lioumis, Konstantinos Keratea Attikis 19001 (GR)
- Politis, Stavros
 Athens 11527 (GR)

(11)

(74) Representative: Koriatopoulou, Pierrina S. 16, Akademias Street 106 71 Athens (GR)

(54) Sustained release formulation for Venlafaxine hydrochloride

- (57) The invention provides a sustained release composition that;
 - Is free of initially increased drug delivery that occurs in sustained release systems containing the water soluble drug venlafaxine HCI, known as burst phenomenon, by using a functional core partially or totally coated by a functional coating layer or film.
 - Delivers the drug substance within 24 hours and is therefore suitable for once daily administration of the said drug substance.
 - 3. Exhibits linearity between the strength of the drug formulation and the total mass of the formulation, by proportional increase of the amounts of the drug substance and the excipients in the formulation.
 - 4. Is possible to be divided in smaller doses, without affecting the release of the drug substance.

The invention provides a sustained release capsule

formulation containing an appropriate number of functional complex mini tablets comprising of:

- A functional core comprising the active ingredient, especially the water-soluble drug Venlafaxine HCl and appropriate excipients.
- 2. A functional coating layer or film that reduces the initial surface of the core that is available for the release of the water-soluble drug Venlafaxine HCI, reducing the burst phenomenon.

Description

BACKGROUND OF THE INVENTION:

5 [0001]

10

15

25

30

35

55

- The rapid initial release of the water-soluble drug substances from matrix delivery systems is a well-known phenomenon. Venlafaxine Hydrochloride (HCL) is a drug substance that is very soluble in water (more than 1000mg are dissolved in 1ml of water), so the said phenomenon is observed when the release of this drug substance from simple matrix systems is studied.
- Another parameter very important for the pharmaceutical industry is the achievement of linearity between strength and formulation. It is well known that drug delivery from matrix systems that are tablets is highly affected by the geometrical characteristics of the tablet-matrix. This phenomenon prevents the achievement of linearity between the different strengths of a drug product and the total weight of the said dosage form. As the strength gets bigger and the size of the matrix increases the dissolution rate is delayed, so the dosage forms that refer to different strengths of the same dug product do not exhibit the same dissolution profile. Linearity between the strength and the formulation of a dosage form without the release characteristics being influenced is highly desired in the pharmaceutical industry for manufacturing, pharmacokinetic and economical reasons.
- An objective of the present study is to provide a sustained release formulation which is free of the increased release
 of the drug observed at the initial stages of release that occurs in sustained release systems containing water
 soluble drugs such as venlafaxine HCl, known as burst phenomenon.
 - Another objective of this study is to provide a sustained release formulation capable of delivering the drug substance within 24 hours and is therefore suitable for once daily administration of the said drug substance.
 - Another objective of this study is to provide sustained release formulation that exhibits linearity between the strength of the drug formulation and the total mass of the formulation, by proportional increase of the amounts of the drug substance and the excipients in the formulation.
 - The dosage form described in the present invention may be divided into smaller doses. This is desired in antidepressant medication treatments, where the therapy is tallored for each individual patient requirement.

Little formulation work has been conducted to date in order to overcome both this release problem concerning water-soluble dug substances such as Venlafaxine HCl and at the same time achieve linearity between strength and formulation as described above. Zero order kinetics are considered an optimal rate for drug delivery from sustained release systems. It is very usual though a rapid release of the drug to be observed during the first hours of release. This rapid initial drug release results to significant deviation from the desired zero order kinetics. This deviation affects the drug plasma concentrations resulting to a higher risk of occurrence of side effects, while effectiveness is deteriorated.

EP700289 describes a type of tablet known as osmotic pump.

- EP1253910 also describes an osmotic pump.
- EP1178780 describes a multiparticulate controlled release selective serotonin reuptake inhibitor (SSRI) formulation
 for oral administration, which comprises pellets coated with rate-controlling polymer, which allows controlled release of the SSRI over a period of not less than 12h.
- WO0224160 describes a formulation of Long Acting Antidepressant Microparticles.
- EP1028718 and EP0797991 describe encapsulated formulations of spheroid particles as sustained release formulation containing Veniafaxine.
- EP1157690 describes a sustained release pharmaceutical composition free of food effect. The composition claimed in this patent is a single double-coated tablet made of compressed granules. Venlafaxine is mentioned as an example of drug substance the absorption of which is known to be influenced by food intake. S.Troy et al., Current Therapeutic Research, VOL.58, NO 8, pp 504-514 performed pharmacokinetic studies in order to assess the effect of food intake on the pharmacokinetic disposition venlafaxine and its active metabolite O-desmethoxyvenlafaxine (ODV). In two studies, Venlafaxine sustained release 75 and 150 mg formulations were administered to healthy subjects in a fasted state or a high fat meal. The studies were conducted with a two period cross over study design. The administration of Venlafaxine sustained release 75 or 150 mg capsules with a fat meal did not affect the rate or extent of Venlafaxine absorption compared with administration to the fasting condition.
 - In all the above-mentioned patents the osmotic pump type or formulations made from microparticles or spheroids
 are suggested. However, these types of formulations require both higher cost of production and more sophisticated
 equipment in relation to more conventional types (e.g. tablets) and at the same time more complicated and thus
 more time consuming production process. On the other hand, the desired zero order release kinetics is not always
 achieved.
 - W09847491 describes an extended release dosage composition in the form of a tablet matrix, comprising of a

drug substance and a combination of a hydrophilic and hydrophobic polymer of well-known groups used for controlled drug delivery formulations. In this patent different rations of the hydrophilic-hydrophobic polymer, as well as channeling agents and surfactants are used in order to modify the wettability of the described matrix, in order to combine it with a drug substance of a given solubility in aqueous systems. This patent is not specifically developed for Venlafaxine HCI and the described dosage form cannot provide linearity between the strength and the formulation of the dosage form, without affecting the release characteristics of the drug substance.

None of the above documents teaches or suggests the present invention.

SUMMARY OF THE INVENTION:

[0002] The instant invention provides a process for reducing the Initial rapid release of the water-soluble drug substance Venlafaxine HCl from the proposed formulation using one or more functional cores coated with a functional coating layer or film that limits the surface of the core(s) that is available for drug release during the initial stages of the drug delivery.

Detailed description:

[0003]

5

15

30

35

40

45

50

- The present invention consists in a multi tablet capsule delivery system.
 - Each capsule of the said delivery system contains 1-6 mini tablets, containing the pharmacologically active watersoluble substance substance Venlafaxine HCI.
 - Each one of the said tablets comprises of a functional core, which is partially or totally coated with an appropriate
 coating agent, so that the surface of the core that is initially available for drug delivery is limited.
- The core comprises of
 - i. The drug substance, Venlafaxine HCl, in a proportion that varies between 10-40% by weight
 - il. 40-80% of a gelling agent. This gelling agent can be chosen among; Hydroxypropylmethylcellulose, hydroxypropylcellulose, hydroxycellulose phthalate, poly(ethyleneoxide), polylactic acid, xanthan gum, alginates, sodium and calcium carboxymethylcellulose, carragheen, carbomer, carbopol (oral use), methylhydroxyethylcellulose, propylhydroxyethylcellulose, polyhema, methylcellulose, alginates another swellable poymers. The swelling agent used in the formulation should preferably be of high viscosity, as the incorporated drug substance is highly soluble in water and the diffusion rate through the gelling agent should be limited, without beholding the drug substance after the desired time window.
 - iii. 30-60% of a non-swellable (also characterized as monolithic or plastic) agent or system comprising of one or a mixture of water insoluble, non-swelling polymers such as: ethyl cellulose, cellulose acetate propionate, cellulose acetate, poly(ethyl acrylate, methyl methacrylate, trimethylammonioethyl methacrylate chloride) 1: 2:0.1, commerced as Eudragit RS 100, poly(ethyl acrylate, methyl methacrylate, trimethylammonioethyl methacrylate chloride) 1:2:0.2 copolymer, commercially available as Eudragit RL®, polyvinylpyrrolidone acetate, polyvinyl chloride, polyvinyl acetate, polyethylene, and others. The function of these compounds is to limit the swelling rate of the gelling agent and to reduce the penetration of water through the pores that are formed by the swelling of the gelling agent and the diffusion of the drug substance from the core.
 - iv. A conjugation agent, a surfactant or a polymer that forms bonds between the gelling agent and the non swellable agent, or between the drug substance and the gelling or the non swellable agent, causing interactions between the constituents of the core that limit its swelling properties. Surfactants that are used as conjugation agents are usually anionic, as sodium lauryl sulphate, sodium docusate, sodium cetostearyl sulphate and triethanolamine lauryl sulphate, in proportions 2-12% by weight. Non ionic compounds, such as polysorbates exhibit weak conjunction ability, while cationic surfactants do not have such properties. Polymers used as binding agents between the gelling agent and the drug substance are polyvinylpyrrolidone, polyvinyl alcohol and polyvinylpyrrolidone acetate, in proportions of 10-30% by weight.
 - v. 1-30% by weight of classical excipients such as:
 - a. Lubricants and glidants, as Mg, Ca and Zn Stearate, silicon dioxide, talc and stearic acid, or any other insoluble in water lubricant or glidant.
 - b. Binders: the binders adopted for the invention should not be feely soluble in water. For example, polyvinylpyrrolidone acetate is preferred over polyvinylpyrrolidone as it obtains sustained release properties and enhances the relevant behavior of the core.
 - c. Diluents: any diluents free of disintegrating properties such as talc, dicalcium phosphate and calcium

sulphate dihydrate could be adopted.

10

15

20

25

30

35

40

45

50

The classical excipients used for the preparation of the core should exhibit low solubility in water and free of disintegrant properties.

- The core can be obtained by either a direct compression process, or through a wet granulation and compression process.
- In order to optimize the cohesiveness of the core a wet granulation process step is essential. The gelling agent (s), the active ingredient, the non-swelling polymers and the conjugation agent(s) are mixed together, comprising the internal phase to be submitted to the wet granulation step. The solvent used for the wet granulation step could be any suitable solvent for use in the manufacture of oral dosage forms. The solvent or mixture of solvents should be able to dilute or disperse the drug substance, the swellable polymers, the non-swellable polymers and the conjunction agent, so that the interactions between the above compounds can be developed. Such solvents are ethanol, acetone, isopropyl alcohol, water and mixtures of the said solvents. Alternatively the non-swelling compound is dissolved into an appropriate co-solvent preparing a 5-40% solution or uniform dispersion that is used for the wet granulation step of the rest of the constituents of the internal phase. The conjunction agent may also be diluted or dispersed in the granulation fluid. Any diluents or binders may be added in the internal phase.
- After drying, the granule mass is mixed with the excipients comprising the external phase (glidants, lubricants and binders) and the granular/powder mixture is compressed into tablets.
- The core is partially or totally coated by a coating layer or a coating film that reduces the initial rapid release of the water-soluble drug substance from the core, via two mechanisms.
 - i. By reducing the surface of the core that is initially available for the release of the drug substance, during the initial stages of the wetting of the dosage form of the said formulation.
 - ii. By suppressing the core and in particular the swellable gelling agents. This way the penetration of water through the core that causes the diffusion of the drug substance and its rapid release during the initial steps of the wetting of the core is limited and the "burst" phenomenon is restricted.

The coating layer is applied on (as described in figure 1):

- i. One surface of the core with thickness that ranges between 3-30% of the diameter of the core, providing a two-layer tablet.
- ii. Two surfaces of the core with thickness that ranges between 3-30% of the diameter of the core, providing a three-layer tablet.
- iii. One surface and the perimeter of the core with thickness that ranges between 3-30% of the diameter of the core, forming a "cap" that covers the larger part of the core, leaving only one flat surface for the release of the drug substance.




Figure 1: description of the application of the functional coating layer

- The coating layer comprises of a polymer and a water-soluble compound. The polymer can be a swelling agent or a non-swelling agent, similar to the ones used for the core. The water soluble compound can be:
- i. A water soluble salt such as sodium chloride, sodium bicarbonate, or any other water soluble salt that can be used as an excipient in a solid oral pharmaceutical formulation.
 - II. A water soluble small organic compound like mannitol, lactose, sucrose, sorbitol, cltric acid or any other water soluble, low relative molecular mass organic compound that can be used as an excipient in a solid oral

pharmaceutical formulation.

iii. A water-soluble polymer like polyvinylpyrrolidone, polyvinyl alcohol, low viscosity hydroxyprolylmethyl cellulose, or any other water-soluble polymer that can be used as an excipient in a solid oral pharmaceutical formulation.

5

10

During the initial stages of the wetting of the coating layer the water-soluble compounds dissolve rapidly, creating pores through the drug substance can be diffused and released.

- The polymer reduces the diffusion of the drug substance by reducing the surface of the core that is available for the dissolution of the drug substance.
- The function of the coating layer is time limited with an optimal duration from 0 up to 2-4 hours of the drug release.
- The function of the coating layer is advanced and terminated through two different mechanisms, depending on the kind of polymer that is enabled:

i. In the case of swellable polymers the wetling of the polymer causes the formation of moving boundaries delimiting different physical conditions inside the matrix of the coating layer (dry coating material, swollen polymer, dissolved/undissolved polymer). The polymer swells through a swelling front that is followed by a diffusion front, through which soluble compounds can be diffused through the mass of the polymer and be released and an eroding front through which the polymer dissolves into the surrounding fluids. The termination of the function of the coating layer consisting of swellable polymers coincides with the extension of the diffusion layer up to the surface of the core. After that stage the surface of the core that was covered by the polymer

layer can be hydrated and the drug substance can be diffused through the swollen polymer.

ii. In the case of non-swellable polymers the termination of the function of the coating layer is achieved by the breaking of the inelastic coating layer due to the swelling of the core as the core is hydrated through the free surfaces and the pores that are created after the soluble compound of the coating layer is dissolved.

25

- The duration of the function of the coating layer is depended on:
 - I. The composition of the coating layer and more specifically the polymer-soluble compound ratio. The polymer is usually added at a 1:1 to 9:1 ratio to the water-soluble compound.
 - Ii. The thickness of the coating layer
 - iii. The kind of the polymer and the kind of the soluble compound

iv. In the case of non-swellable polymers the resistance of the coating layer is also depended on the presence and the percentage of plasticizers. The plasticizers are used in a percentage that ranges between 0-10% and increase the elasticity and consequently the endurance of the coating layer. This way the time period that the coating layer is functional can be controlled through another parameter, the percentage of the plasticizer. Plasticizers used in such formulations are polyethylene glycol, triethyl citrate, glycerol, 1,2 propylene glycol.

35

40

30

- The coating layer is applied on the core by a compression process, after mixing the excipients that compose it. As a result the coating layer may contain classical excipients used in direct compression processes, such as glidants, lubricants, diluents and binders. In contrast with the formulation of the cores the coating layer may contain disintegrating agents (such as microcrystalline cellulose, pregelatinized starch, sodium starch glycollate and calcium carboxymethyl cellulose) in proportion between 0-5%, as long as these agents enhance the formation of pores through the polymer mass and do not affect the continuity of the coating layer during the early stages of the drug release.
- The cores may also be film coated. Similarly to the coating layer, the coating material is functional for a determined
 period of time that does not exceed the first 4 hours of the drug release from the core. The film coating usually
 represents from 1.5 to 18%, by weight of the weight of the mini tablet.
 - The film coating material contains a polymer at a proportion that ranges between 10-80% of the dry mass of the coating material. The said polymer creates a film that covers the core, reducing the surface of the core that is initially available for the dissolution of the drug substance.
 - The delivery of the drug substance in the initial stages of the wetting of the coated mini tablets is through pores
 that are created by the dissolution of water soluble compounds that the coating film contains in a proportion that
 usually ranges from 20-50% by weight.
 - The polymers that can be used are:

55

- i. Swellable polymers such as those recited above with respect to the formulation of the core.
- ii. Non-swellable such as those recited above with respect to the formulation of the core.
- ill. pH-dependent polymers that are insoluble in addic environment (like the gastric fluids), while they dissolve

in slightly acidic (pH 4.5-5.5), neutral or slightly basic pH (6.0-8.0). Such polymers are:

- a) Cellulose acetate phthalate, a polymer that dissolves at pH values over 6.4.
- b) Poly(butyl methacrylate, (2-dimethyl aminoethyl) methacrylate, methyl methacrylate) 1:2:1 copolymer, commercially available as Eudragit E®, that dissolves in pH values lower than 5.
- c) poly(ethyl acrylate, methyl methacrylate) 2:1 copolymer, commercially available as Eudragit 30D®, that dissolves in pH values of about 5.5.
- d) poly(methacrylic acid, methyl methacrylate) 1:1 copolymer, commercially available as Eudragit L@, that dissolves in pH values of about 6.7.
- e) poly(methacrylic acid, methyl methacrylate) 1:2 copolymer, commercially available as Eudragit S®, that dissolves in pH values of about 6.7.
- The water-soluble compound may be the same as the ones recited above with respect to the water-soluble compounds of the coating layer.
- The coating material may also contain classical excipients such as those recited above with respect to the formulation of the core, as well as plasticizers (such as those recited above with respect to the formulation of the coating layer), colorants (e.g. quinoline yellow, indigotine, sunset yellow), opacifiers (usually titanium dioxide), adhesive agents (such as low viscosity hydroxypropyl methyl cellulose, hydroxypropyl cellulose and polyvinylpyrrolidone), at a total proportion that ranges between 10-50% by weight of the total weight of the dry coating material.
- Ethanol, acetone, water isopropyl alcohol, methylene chloride, chloroform or any other pharmaceutically suitable solvent may be used, as well mixtures of the said solvents, as long as can dissolve or uniformly disperse the constituents of the coating mixture. The solid content of the coating solution or dispersion typically ranges between 3-40% by weight. The dissolution or dispersion of the solid content of the coating material may be optimised by the use of polyethylene glycol in an amount from 0 to 10% by weight of the coating material.
- 25 In the case of the film coating the function of the coating is terminated at an optimal time period as said above.
 The mechanisms that cause the termination of the function of the film coating are:
 - I. In the case of coating films consisting of swellable polymers the function of the coating is terminated when the diffusion layer reaches the surface of the core. After that stage the surface of the core that was covered by the polymer layer can be hydrated and the drug substance can be diffused through the swollen polymer, similarly to the process recited above for the coating layers.
 - ii. In the case of coating films consisting of non-swellable polymers the function of the coating is terminated when the swelling of the core breaks the polymer layer, similarly to the process recited above for the coating layers. The diffusion of the soluble compound creates pores through the core can be hydrated and swell.
 - iii. In the case of pH-dependent polymer films the function of the coating is terminated through two potential mechanisms: firstly the same mechanism that occurs when the non-swelling polymers are enabled and secondly the change of the pH of the aqueous environment throughout the gastrointestinal track.

PREFERRED EMBODIMENTS:

[0004]

5

10

30

35

40

45

- One preferred embodiment is a capsule containing an appropriate number of mini tablets, in a way that linearity between the strength and the total weight of the dosage form is achieved (1 to 6 mini tablets per capsule).
 Each tablet comprises;
 - i. A functional core comprising Venlafaxine HCl, one or more gelling agents, one or more non-swelling agents, one or more conjugation agents and appropriate quantities of classical excipients
 - ii. A functional coating comprising an enteric film coating containing water-soluble compound.

EXAMPLES: The following examples illustrate the invention without limiting it:

1) EXAMPLES ILLUSTRATING THE INVENTION MACROSCOPICALLY

55 [0005]

- Example 1.1: a 0 or 00 size capsule containing 1-6 Venlafaxine 25mg coated mini-tablets
- Example 1.2: a 0 or 00 size capsule containing 1-4 Venlafaxine 37.5mg coated mini-tablets

- Example 1.3: a 0 or 00 size capsule containing 1-3 Ventafaxine 50mg coated mini-tablets
- Example 1.4: a 0 or 00 size capsule containing 1-2 Venlafaxine 75mg coated mini-tablets

2) EXAMPLES ILLUSTRATING THE CORE:

[0006]

5

35

40

45

50

55

Example 2.1: the following formulation was prepared:

Ingredient	Venlafaxine 25 mg core	Venlafaxine 37.5 mg core	Veniafaxine 50 mg core	Venlafaxine 75 mg core	% in the core
Veniafaxine HCI (equivelant to 1:1.132 Veniafaxine base)	28,30	42;45	56,60	84,90	26,87
Sodium Lauryi Suiphate	7,37	11,06	14,75	22,12	7,00
Eudragit RS 100	7,07	10,61	14,15	21,22	6,72
Methocel K100 M	62,06	93,09	124,12	186,18	58,92
Magnesium stearate	0,53	0,79	1,05	1,58	0,50
Total	105,33	158,00	210,67	316,00	100,00

Manufacturing process: Venlafaxine HCI, Methocel K 100 M®, and SLS are sieved through a 30 mesh sieve and mixed for an appropriate time period until a uniform mixture is formed. This mixture comprises the internal phase of the formulation. Eudraglt RS 100® is dissolved in acetone, preparing a wet granulation fluid. The constituents of the internal phase are wet granulated using the wet granulation fluid. The granular mixture is dried to constant weight in an oven at 40°C (the total content in solvents is estimated using the Loss on drying method as described in the European Pharmacopoeia 3rd Edition and should be less than 1.5%). The dry granule is mixed with the rest of the excipients in a drum mixer and the resulting mixture is pressed into biconvex tablets (almost spherical in shape) of appropriate mass relatively to the strength and hardness using a Killian® tabletting machine. For the Venlafaxine 25mg cores 5mm punches were used, for the 37.5 and 50mg cores 6mm punches were used, while for the 75mg cores 7mm punches were used. The mini-tablets are placed into 00-sized capsules.

Example 2.2: the following formulation was prepared:

Ingredient	Veniafaxine 25 mg core	Venlafaxine 37.5 mg core	Venlafaxine 50 mg core	Venlafaxine 75 mg core	% In the core
Veniafaxine HCI (equivelant to 1:1.132 Veniafaxine base)	28,30	42,45	56,60	84,90	26,87
Sodium Lauryl Sulphate	5,00	7,50	10,00	15,00	4,75
Eudragit RS 100	7,07	10,61	14,15	21,22	6,72

(continued)

	Ingredient	Venlafaxine 25 mg core	Venlafaxine 37.5 mg core	Venlafaxine 50 mg core	Venlafaxine 75 mg core	% in the core
5	Methocel K100 M	57,36	86,04	114,72	172,08	54,46
	Kollidon SR	7,07	10,61	14,15	21,22	6,72
10	Magnesium stearate	0,53	0,79	1,05	1,58	0,50
	Total	105,33	158,00	210,67	316,00	100,00

- Manufacturing process: the same manufacturing process as the one recited above with respect to the core of example 2.1. Kollidon SR® is a commercial name for polyvinulpyrolidon acetate and it was added in the internal phase.
 - Example 2.3: the following formulation was prepared:

Ingredient	Venlafaxine 25 mg core	Venlafaxine 37.5 mg core	Venlafaxine 50 mg core	Venlafaxine 75 mg core	% in the core
Venlafaxine HCI (equivelant to 1:1.132 Venlafaxine base)	28,30	42,45	56,60	84,90	26,87
Sodium Lauryi Sulphate	6,32	9,48	12,64	18,96	6,00
Eudragit RS 100	7,07	10,61	14,15	21,22	6,72
Methocel K100 M	56,04	84,06	112,08	168,12	53,20
Kollidon SR	7,07	10,61	14,15	21,22	6,72
Magnesium stearate	0,53	0,79	1,05	1,58	0,50
Total	105,33	158,00	210,67	316,00	100,00

- Manufacturing process: the same manufacturing process as the one recited above with respect to the core of example 2.1. Kollidon SP® is a commercial name for polyvinulpyrolidon acetate and it was added in the internal phase.
- Example 2.4: the following formulation was prepared:

45

50

Ingredient	Venlafaxine 25 mg core	Venlafaxine 37.5 mg core	Veniafaxine 50 mg core	Venlafaxine 75 mg core	% in the core
Venlafaxine HCI (equivelant to 1:1.132 Venlafaxine base)	28,30	42,45	56,60	84,90	26,87

(continued)

	Ingredient	Venlafaxine 25 mg core	Ventafaxine 37.5 mg core	Venlafaxine 50 mg core	Venlafaxine 75 mg core	% in the core
5	Sodium Lauryl Sulphate	8,43	12,64	16,85	25,28	8,00
	Eudragit RS 100	7,07	10,61	14,15	21,22	6,72
10	Methocel K100 M	53,93	80,90	107,87	161,80	51,20
	Kollidon SR	7,07	10,61	14,15	21,22	6,72
5	Magnesium stearate	0,53	0,79	1,05	1,58	0,50
	Total	105,33	158,00	210,67	316,00	100,00

- Manufacturing process: the same manufacturing process as the one recited above with respect to the core of example 2.1. Kollidon SR® is a commercial name for polyvinulpyrolidon acetate and it was added in the internal phase.
 - Example 2.5: the following formulation was prepared:

25	Ingredient	Veniafaxine 25 mg core	Venlafaxine 37.5 mg core	Venlafaxine 50 mg core	Venlafaxine 75 mg core	% In the core
30	Veniafaxine HCI (equivelant to 1:1.132 Veniafaxine base)	28,30	42,45	56,60	84,90	26,87
35	Sodium Lauryi Sulphate	8,43	12,64	16,85	25,28	8,00
	Eudragit RS 100	14,15	21,22	28,29	42,44	13,43
40	Methocel K100 M	35,57	53,36	71,15	106,72	33,77
	Kollidon SR	14,15	21,22	28,29	42,44	13,43
	Magnesium stearate	0,53	0,79	1,05	1,58	0,50
45	Talc	4,21	6,32	8,43	12,64	4,00
	Total	105,33	158,00	210,67	316,00	100,00

- Manufacturing process: the same manufacturing process as the one recited above with respect to the core of example 2.1. Kollidon SR® is a commercial name for polyvinylpyrrolidon acetate and it was added in the internal phase.
 - Example 2.6: the following formulation was prepared:

	Ingredient	Veniafaxin e 25 mg core	Venlafaxin e 37.5 mg core	Venlafaxin e 50 mg core	Veniafaxin e 75 mg core	% in the core
5	Veniafaxine HCI (equivelant to 1:1.132 Veniafaxine base)	28,30	42,45	56,60	84,90	26,87
	HPC	5,00	7,50	10,00	15,00	4,75
	Eudragit RS 100	7,07	10,61	14,15	21,22	6,72
15	Methocel K100 M	57,36	86,04	114,72	172,08	54,46
	Kollidon SR	7,07	10,61	14,15	21,22	6,72
20	Magnesium stearate	0,53	0,79	1,05	1,58	0,50
	Total	105,33	158,00	210,67	316,00	100,00

 Manufacturing process: the same manufacturing process as the one recited above with respect to the core of example 2.1. Kollidon SR® is a commercial name for polyvinulpyrrolidon acetate and it was added in the internal phase.

- The release profiles of the above formulations were tested using a dissolution apparatus with paddles at 100 rpm using 500ml of a pH 1.2 solution for the first two hours and 1000ml of phosphate buffer solution for the rest of the test (total duration 24 h). The results of the dissolution tests are presented in the following table (table 1) and figure 2:

Table 1:

	dissolution tests concerning the cores described in examples 2.1 to 2.6 (% Dissolved						
Time	Core of example 2.1	Core of example 2.2	Core of example 2.3	Core of example 2.4	Core of example 2.5	Core of example 2.6	
1	17,2	25,5	19,7	19,1	19,2	27,5	
2	32,1	36,0	28,9	26,6	27,8	37,1	
4	41,2	44,0	35,9	33,2	33,5	46,1	
6	49,7	52,2	43,2	40,1	39,8	54,4	
8	63,5	66,0	53,9	51,7	48,0	67,9	
10	72,7	75,0	63,4	60,2	55,6	77,7	
12	79,5	81,8	71,1	68,2	64,5	85,8	
16	84,6	86,2	74,5	71,7	66,1	87,8	
20	89,9	91,3	80,7	76,0	71,9	93,5	
24	95,6	100,0	83,9	80,7	76,3	102,0	


55

25

30

35

40

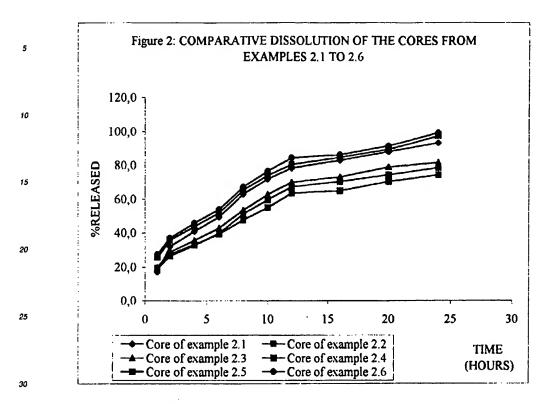

- Similar results were noticed when the other strengths were tested for the release of the drug substance, as well as when combinations of the above cores were tested.
- 35 The cores containing a conjugation agent exhibited lower initial release of the drug substance Venlafaxine HCl, in a degree the ranges between 3-10%.
 - There is an optimal ratio between the quantities of the swelling polymer, the non-swelling polymer and the conjugation agent. At this ratio the initial release of Venlafaxine HCl from the formulation is reduced, while the drug substance is quantitatively released from the core at the end of the test (set at 24 hours).

3) EXAMPLES ILLUSTRATING THE COATING LAYER:

[0007]

Į

40

45

- The following examples of the coating layer are applied using the core described in example 2.1 as a model core, so that the effect of the coating layer on the formulation can be evaluated. The 75mg core was enabled as a worst case as it is the core with the biggest surface.
- Example 3.1: based on the core described in example 2.1 and the following formulation was prepared for the coating layer:

Example 3.1	
Coating Layer Constituents	%
Cellulose Acetate Propionate	99,0
Magnesium Stearate	1,0

The constituents of the coating layer are mixed until a uniform powder mixture is prepared. Then the coating layer is applied by compression on the precompressed core. For the two layer and the three layer tablets the coating layer is applied using the same punches as the ones used for the compression of the core. In the case that the perimeter and one side of the core are coated the punch used for the application of the coating layer is of bigger diameter (usually 1 to 4mm larger than the diameter of the core). Two levels of the thickness of the coating layer were tested, 1.0 and 2.0 mm, as for the effect of the coating layer on the dissolution profile of complex tablets.

5

10

15

20

25

30

35

45

50

 Example 3.2: based on the core described in example 2.1 and the following formulation was prepared for the coating layer:

Example 3.2	
Coating Layer Constituents	%
Methocel E 50LV	99
Magnesium Stearate	1

 Manufacturing process: the same manufacturing process as the one recited above with respect to the coating layers of example 3.1.

 Example 3.3: based on the core described in example 2.1 and the following formulation was prepared for the coating layer:

Example 3.3	
Coating Layer Constituents	%
POLYOX 900000	99
Magnesium Stearate	1

 Manufacturing process: the same manufacturing process as the one recited above with respect to the coating layers of example 3.1.

 Example 3.4: based on the core described in example 2.1 and the following formulation was prepared for the coating layer:

Example 3.4					
Cellulose Acetate Propionate	79,0				
PVP	20,0				
Magnesium Stearate	1,0				

 Manufacturing process: the same manufacturing process as the one recited above with respect to the coating layers of example 3.1.

 Example 3.5: based on the core described in example 2.1 and the following formulation was prepared for the coating layer:

Example 3.5	
Cellulose Acetate Propionate	74,0
PVP	20,0
PEG	5,0
Magnesium Stearate	1,0

 Manufacturing process: the same manufacturing process as the one recited above with respect to the coating layers of example 3.1.

55 - Example 3.6: based on the core described in example 2.1 and the following formulation was prepared for the coating layer:

Example 3.6	
Cellulose Acetate Propionate	71,5
PVP	17,5
PEG	10,0
Magnesium Stearate	1,0

5

15

20

25

30

35

40

45

50

55

10 - Manufacturing process: the same manufacturing process as the one recited above with respect to the coating layers of example 3.1.

 Example 3.7; based on the core described in example 2.1 and the following formulation was prepared for the coating layer:

Example 3.7	
Methocel E 50LV	79,0
PVP	20,0
Magnesium Stearate	1,0

 Manufacturing process: the same manufacturing process as the one recited above with respect to the coating layers of example 3.1.

- Example 3.8: based on the core described in example 2.1 and the following formulation was prepared for the coating layer:

Example 3.8				
Methocel E 50LV	79,0			
Lactose	20,0			
Magnesium Stearate	1,0			

 Manufacturing process: the same manufacturing process as the one recited above with respect to the coating layers of example 3.1.

- The release profiles of the above complex systems were tested using a dissolution apparatus with paddles at 100 rpm using 500ml of a pH 1.2 solution for the first two hours and 1000ml of phosphate buffer solution for the rest of the test (total duration 24 h).

- The results of the dissolution tests performed for the most typical of the above systems are presented in the following tables:

Table 2:

Coating layer	Kind of complex system	Thickness of coating layer dealers	%Release of Venlafaxne HC			ne HCl		
			1h	2h	4h	10h	16h	24h
Example 3.1	Two layer tablets	1mm	15,0	28,7	38,1	70,9	82,3	96,
		2mm	14,2	28,0	37,6	70,1	81,4	95,4
•	Three layer tablets	1mm	10,9	26,3	33,4	68,9	80,5	93,4
		2mm	11,1	26,7	32,8	67,7	80,2	93,
	Coating ofthe	1mm	5,4	23,7	31,8	67,5	81,0	94,
	perimeter and one side of the core	2mm	5,2	22,3	30,7	66,7	80,2	93,

Table 3:

Coating layer	Kind of complex system	Thickness of coating layer	%Release of Venlafaxine H			ine HCI		
			1h	2h	4h	10h	16h	24h
Example 3.2	Two layer tablets	1mm	14,5	26,5	35,3	70,5	83,6	97,1
		2mm	13,9	26,9	34,9	70,1	71,7	98,1
	Three layer tablets	1mm	9,8	25,3	32,7	68,9	72,3	99,1
		2mm	9,6	24,9	30,1	67,4	72,1	99,2
	Coating of the	1mm	5,5	20,4	29,4	65,3	78,9	93,7
	perimeter and one side of the core	2mm	5,2	18,0	25,3	59,8	72,3	91,7

Table 4:

	dia a baian manfila	rable 4.	a a rib a d	in even	nlo 2 4			
Coating layer	Kind of complex system	using the coating layer de Thickness of coating layer				ne HCI		
			1h	2h	4h	10h	16h	24h
Example 3.4	Two layer tablets	1mm	16,2	30,1	38,7	72,4	85,1	96,7
		2mm	16,1	29,4	38,4	71,0	84,2	96,4
	Three layer tablets	1mm	12,1	28,3	35,6	70,3	85,6	97,8
		2mm	10,1	27,2	33,9	67,9	84,7	96,8
	Coating of the	1mm	4,9	21,3	28,4	64,3	79,8	94,3
	perimeter and one side of the core	2mm	4,6	18,9	27,6	63,2	76,6	92,5

Table 5:

	dissolution profit	le using the coating layer	aescribe	ed in ex	ampie 3	.b		
Coating layer	Kind of complex system	Thickness of coating layer		%Release of Venlafaxine HCI				
			1h	2h	4h	10h	16h	24h
Example 3.6	Two layer tablets	1mm	15,9	24,6	36,2	70,9	84,2	95,8
		2mm	16,1	24,3	31,2	68,4	82,1	96,7
	Three layer tablets	1mm	12,3	22,1	34,1	70,2	,82,6	96,8
		2mm	10,1	22,3	28,9	65,2	79,8	92,3
	Coating of the	1mm	5,2	16,4	24,3	59,8	74,5	89,1
	perimeter and one side of the core	2mm	4,9	16,2	23,2	57,9	73,2	88,1

Table 6:

		dissolution profile	using the coating layer de	scribed	in exam	ple 3.8			
5	Coating layer	Kind of complex system	Thickness of coating layer	%Release of Venlafaxine HCI					
				1h	2h	4h	10h	16h	24h
	Example 3.8	Two layer tablets	1mm	16,2	29,7	39,5	79,0	93,6	98,9
10			2mm	15,6	30,1	39,1	78,5	80,3	99,1
		Three layer tablets	1mm	11,0	28,3	36,6	77,2	81,0	97,8
			2mm	10,8	27,9	33,7	75,5	80,8	96,3
15		Coating of the	1mm	6,2	22,8	32,9	73,1	88,4	99,7
.,	pe	perimeter and one side of the core	2mm	5,8	20,2	28,3	67,0	81,0	98,1

 The above results show that the said complex systems can be applied with great flexibility and cause an extensive reduction of the initial drug release. This reduction ranges from 2 to 13.5%, while the duration of the function of the coating layer can also be controlled and manipulated.

4) EXAMPLES ILLUSTRATING THE COATING FILM:

[0008]

20

30

35

40

- The following examples of the coating films are applied on the core described in example 2.1 as a model core, so that the effect of the coating film on the formulation can be evaluated. The 75mg core was enabled as a worst case as it is the core with the biggest surface.

 Example 4.1: based on the core described in example 2.1 and the following formulation was prepared for the coating film:

Example 4.1				
Coating Film Constituents	%			
Eudragit RS	50,0			
PEG	5,0			
Talc	15,0			
Lactose	20,0			
Magnesium stearate	10,0			
Solvents: Acetone, Acetone:Ethanol 1:1				

- Manufacturing process: The constituents of the coating film are dispersed in the solvent mixture preparing a homogeneous dispersion of 5-15% solid content. Then the coating film is spray-coated on the cores that were preheated at 70°C. The coating process was completed when the film coating of each core reached a weight of 7-10% of the weight of the core. The film-coated cores were dried for 2hours at 40°C.
- Example 4.2: based on the core described in example 2.1 and the following formulation was prepared for the coating film:

Example 4.2	
Coating Film Constituents	%
Ethyl Cellulose	30,0
HPMC 50cp	20,0

(continued)

Example 4.2	
PEG	5,0
Talc	15,0
PVP	20,0
Magnesium stearate	10,0
Solvents: Acetone:Isoprop	anol 1:1

Manufacturing process: the same manufacturing process as the one recited above with respect to the coating film of example 4.1.

- Example 4.3: based on the core described in example 2.1 and the following formulation was prepared for the coating film:

Example 4.3	
Coating Film Constituents	%
Cellulose Acetate Propionate	30,0
HPMC 50cp	10,0
PEG	15,0
Talc	15,0
PVP	20,0
Magnesium stearate	10,0
Solvents: Acetone: Isopropar	nol 1:1

Manufacturing process: the same manufacturing process as the one recited above with respect to the coating film of example 4.1.

Example 4.4: based on the core described in example 2.1 and the following formulation was prepared for the coating film:

Example 4.4	
Coating Film Constituents	%
Cellulose Acetate Phthalate	30,0
Ethyl Cellulose	10,0
PEG	15,0
Talc	15,0
PVP	20,0
Magnesium stearate	10,0
Solvents: Acetone: Ethanol 1:1, Acetone, Ace	etone:H20 97:3

 Manufacturing process: Manufacturing process: the same manufacturing process as the one recited above with respect to the coating film of example 4.1.

 Example 4.5: based on the core described in example 2.1 and the following formulation was prepared for the coating film:

Example 4.5	
Coating Film Constituents	%

16

5

10

20

15

25

30

40

35

45

3

(continued)

Example 4.5	
Kollicoat SR 30 D	60,0
Propylene Głycol	12,5
Talc	7,5
PVP	10,0
Magnesium stearate	10,0
Water	

5

10

20

25

30

40

45

50

55

- Manufacturing process: the same manufacturing process as the one recited above with respect to the coating film of example 4.1.

- Example 4.6: based on the core described in example 2.1 and the following formulation was prepared for the coating film:

Example 4.6	
Coating Film Constituents	%
Eudragit L	12,5
Eudragit S	37,5
Dibutyl sebacate	5,0
Talc	15,0
Lactose	20,0
Magnesium stearate	10,0
Solvents: Acetone:Isopropa	nol 1:1

- Manufacturing process: the same manufacturing process as the one recited above with respect to the coating film of example 4.1.

 Example 4.7: based on the core described in example 2.1 and the following formulation was prepared for the coating film:

Example 4.7	
Coating Film Constituents	%
Eudragit L	37,5
Eudragit S	12,5
Dibutyl sebacate	5,0
Talc	15,0
PVP	20,0
Magnesium stearate	10,0
Solvents: Acetone:Isopropa	nol 1:1

Manufacturing process: the same manufacturing process as the one recited above with respect to the coating film
of example 4.1.

Table 7:

Kind of coating film	Weight of the coating film as %of the core	ore as described in example 2.1) %Release of Venlafaxne HCI					
	weight	1h	2h	4h	10h	16h	2
Example 4.1	4%	9,9	26,8	33,4	71,3	83,8	9
-	8%	6,5	24,1	34,7	75,6	88,9	10
Example 4.2	4%	13,8	26,6	34,5	69,4	71,0	9
	8%	8,0	24,3	35,0	76,1	85,6	10
Example 4.3	4%	12,2	29,5	33,9	71,5	83,4	ξ
	8%	5,6	18,5	26,4	66,0	84,5	10
Example 4.4	4%	10,4	20,9	28,9	64,8	79,4	9
	8%	4,6	18,9	27,6	63,2	76,6	9
Example 4.5	4%	12,3	27,1	35,9	73,3	87,2	10
	8%	8,9	23,7	32,6	69,3	83,1	8
Example 4.6	4%	12,6	29,4	37,0	73,1	89,0	10
	8%	8,7	26,8	34,5	72,0	85,1	10
Example 4.7	4%	15,6	28,9	37,2	69,5	82,6	9
	8%	7,6	25,1	32,8	66,9	81,2	9

The above results show that the coating films can be applied with great flexibility and cause an extensive reduction
of the initial drug release. This reduction ranges from about 3 to about 13%, while the duration of the function of
the film coating can also be controlled and manipulated.

Claims

40

45

50

- A pharmaceutical dosage form comprising an extended release formulation of the water-soluble drug substance Venlafaxine HCI, comprising a hard gelatin capsule containing a therapeutically effective number of mini tablets comprising of a functional core and a functional coating layer or coating film, so that the initial rapid release of the drug substance from the cores is limited.
- 2. A pharmaceutical dosage form according to claim 1 wherein the cores of the mini tablets are composed of about 10-40% by weight of Venlafaxine HCI, about 40-80% by weight of a gelling agent, about 30-60% by weight of a non-swelling agent, 2-12% by weight of a conjugation agent and 1-30% by weight of classical excipients with the exception of excipients that exhibit disintegrating properties.
- A pharmaceutical dosage form according to claim 2 wherein the gelling agent is polymer is selected from the group
 of Hydroxypropylmethylcellulose, hydroxypropylcellulose, hydroxycellulose phthalate, poly(ethyleneoxide), polylactic acid, xanthan gurn, alginates, sodium and calcium carboxymethylcellulose, carragheen, carbomer, carbopol
 (oral use), methylhydroxyethylcellulose, propylhydroxyethylcellulose, polyhema, methylcellulose and alginates.
- 4. A pharmaceutical dosage form according to claim 2 wherein the non-swelling polymer is selected from the group comprising from ethyl cellulose, cellulose acetate propionate, cellulose acetate, poly(ethyl acrylate, methyl methacrylate, trimethylammonioethyl methacrylate chloride) 1:2:0.1, commerced as Eudragit RS 100, poly(ethyl acrylate, methyl methacrylate, trimethylammonioethyl methacrylate chloride) 1:2:0.2 copolymer, commercially available as Eudragit RL®, polyvinylpyrrolidone acetate, polyvinyl chloride, polyvinyl acetate or polyethylene.
- 5. A pharmaceutical dosage form according to claim 2 wherein the polymers of the core are conjugated by a phar-

maceutically accepted conjugation agent, such as sodium lauryl sulphate, sodium docusate, sodium cetostearyl sulphate and triethanolamine lauryl sulphate, that causes the decrease on the swelling properties of the core.

- 6. A pharmaceutical dosage form as defined in claim 1 wherein the cores are partially coated by a functional coating layer, covering one or two surfaces of the core, or one surface and the perimeter of the core and the thickness of the coating layer ranging between 3-30% of the diameter of the core.
- 7. A pharmaceutical dosage form as defined in claim 6, wherein the functional coating layer is comprised of a polymer and a water soluble compound, wherein the said polymer and the said water soluble compound are present in a weight ratio of about 1:1 1 to 9:1.

10

15

- 8. A pharmaceutical dosage form as defined in claim 6, wherein the polymer is either selected from the group consisting of swellable polymers as the ones recited above in claim 3, or from the group consisting of non-swellable polymers, as the ones recited above in claim 4.
- 9. A pharmaceutical dosage form as defined in claim 6, wherein the water soluble compound is selected either from the group of water soluble salts, such as sodium chloride, sodium bicarbonate or the group of low relative molecular mass organic solid excipients, such as mannitol, lactose, sucrose, sorbitol or citric acid or from the group of water soluble polymers such as polyvinylpyrrolidone, polyvinyl alcohol or low viscosity hydroxyprolylmethyl cellulose.
- 10. A pharmaceutical dosage form as defined in claim 1 wherein the cores are film coated by a functional coating film, that represent about 1.5 to 18% by weight of the weight of the core, applied to a sufficient thickness to reduce the initial release of the drug substance from the said formulation.
- 25 11. A pharmaceutical dosage form as defined in claim 10, wherein the functional coating film is comprised of a polymer in a proportion of 10-80% of the dry coating material and a water soluble compound, in a proportion of 20-50% of the dry coating material.
- 12. A pharmaceutical dosage form as defined in claim 11, wherein the polymer is selected either from the group consisting of swellable polymers such as the ones recited in claim 3, or from the group consisting of non-swellable polymers such as the ones recited in claim 3 or from the group of pH-depended polymers that are insoluble in acidic environments while they soften or dissolve in neutral or basic environments, such as cellulose acetate phthalate, Poly(butyl methacrylate, (2-dimethyl aminoethyl) methacrylate, methyl methacrylate) 1:2:1 copolymer, commercially available as Eudragit E®, poly(ethyl acrylate, methyl methacrylate) 2:1 copolymer, commercially available as Eudragit S®.
 35 as Eudragit 30D®, poly(methacrylic acid, methyl methacrylate) 1:1 copolymer, commercially available as Eudragit S®.
 - 13. A pharmaceutical dosage form as defined in claim 11, wherein the water-soluble compound is selected from the groups recited above in claim 9.
 - 14. A pharmaceutical dosage form as defined in claim 1 wherein the coating layer or the coating film further comprises a pharmaceutically accepted plasticizer.
- 15. A pharmaceutical dosage form as defined in claim 1 wherein the coating layer further comprises classical excipients
 selected from the group of binders, diluents, glidants, lubricants, adhesive agents, opacifiers and colorants.
 - 16. A pharmaceutical dosage form as defined in claim 1 wherein the coating film further comprises classical excipients selected from the groups of and colorants.
- 59 17. A pharmaceutical dosage form as defined in claim 1 wherein the coating film is applied from a solution or dispersion of the said polymer and the said water soluble compound in a pharmaceutically acceptable solvent or mixture of pharmaceutically acceptable solvents where the selected constituents of the coating film can be uniformly dissolved or dispersed.
- 18. A pharmaceutical dosage form as defined in claim 1 wherein the drug substance the gelling agent, the non-swellable polymer and the conjugation agent are wet granulated using a pharmaceutically acceptable solvent or mixture of solvents.

- 19. A pharmaceutical dosage form as defined in claim 1 wherein the said capsule comprises one to six of the said mini tablets each one containing 25 to 75 mg of the drug substance.
- 20. A pharmaceutical dosage form as defined in claim 1 wherein linearity between the total weight of the said mini tablets and the strength of the said dosage form is achieved.

5

15

20

25

30

40

45

- 21. A pharmaceutical dosage form as defined in claim 1 wherein the dose may be divided by reducing the number of tablets in each capsule.
- 22. A pharmaceutical dosage form as defined in claim 1, comprising an extended release formulation for once daily administration, which comprises mini tablets partially or totally coated by a coating layer or coating film that is functional only during the first 2-4 hours of the drug release.
 - 23. A method of preparing a drug delivery system which comprises: a) preparing the cores by a wet granulation, drying and compression process, b) applying a functional coating layer on the cores using a direct compression process or applying a functional coating film on the cores using a spraying process, c) encapsulating the mini tablets by using an appropriate encapsulating device.



EUROPEAN SEARCH REPORT

Application Number EP 03 38 6019

		ERED TO BE RELEVANT		
Category	Citation of document with it of relevant passe	ndication, where appropriate, ges	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A,D	WO 99 22724 A (AME) 14 May 1999 (1999-6 * page 7; example 1	05-14)	1-22	A61K9/48 A61K31/137
X	WO 03 013480 A (DES	SHMUKH ABHIJIT MUKUND ATYASAHEB (IN): KOLHE	23	TECHNICAL FIELDS SEARCHED (Int.CL.7) A61K
	The present search report has b	een drawn up for all claims	-	
	Ptice of search	Cale of completor of the search		Exeminer
	THE HAGUE	28 November 200	3 Mul.	ler, S
X: partic Y: partic docur A: both O: non-	TEGORY OF CITED DOCUMENTS cularly relevant if taken alone sularly relevant if combined with anoth ment of the sarre category nological background written dedocure mediate document	T: theory or princip E: earlier petent of after the filing d. er D: document cited L: document disol	ple underlying the im ocument, but publish ete In the application for other receons	vention ned on, or

EPO FORM 1503 M AP (POALSI)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 03 38 6019

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-11-2003

	Patent documer cited in search rep		Publication date		Patent fami member(s		Publication date
WO	9922724	Α	14-05-1999	AT AU	237320 747978		15-05-2003 30-05-2002
				AU	1300399		24-05-1999
				BG	104397	Α	28-02-2001
				BR	9813179	Α	22-08-2000
				CA	2305242	Al	14-05-1999
				CN	1278165	T	27-12-2000
				CZ	20001659	A3	17-10-2001
				DE	69813602	D1	22-05-2003
				DE	69813602	T2	06-11-2003
				DK	1028718	T3	28-07-2003
				EE	200000212	A	16-04-2001
				EP	1028718	A2	23-08-2000
				HR	20000213	Al	31-12-2000
				ΗU	0004287	A2	29-04-2002
				JP	2001521892	T	13-11-2001
				NO	20002126	A	04-05-2000
				NZ	504460	A	31-01-2003
				PL	341141	A1	26-03-2001
				PT	1028718	T	31-07-2003
				SI	1028718	T1	31-08-2003
				SK	6472000	A3	07-11-2000
				TR	200001232	T2	21-12-2000
				WO	9922724		14-05-1999
				US	2002197307		26-12-2002
				US	2003215507		20-11-2003
				US	6274171		14-08-2001
				US	2001055612		27-12-2001
				US	2002025339		28-02-2002
				ZA	9818081	A 	04-05-2000
WO	03013480	Α	20-02-2003	WO	03013480	A1	20-02-2003
				• • • •			

ti For more details about this annex : see Official Journal of the European Patent Office, No. 12/82